




TWO-PIECE: BOLT-ON YOKES AT BOTH ENDS

BEFORE YOU MEASURE

- Suspension at normal ride height: wheels on the ground, or the axle supported on a drive-on lift. Never measure with the wheels hanging.
- Measure the vehicle, not the old driveshaft.
- Aim for within 1/8 inch. Unsure? Text us photos first.

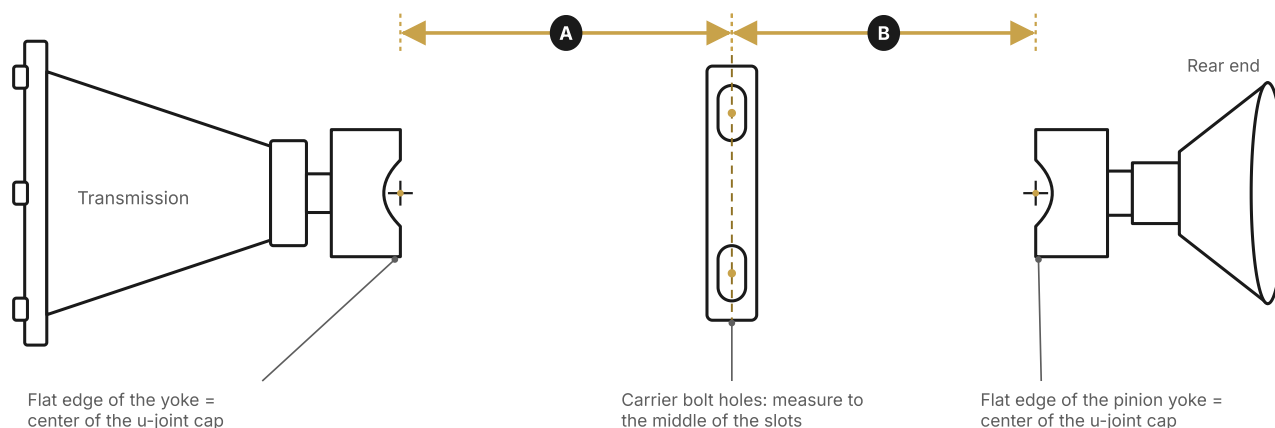

A · Front length	From the flat edge of the transmission yoke (the centerline of the u-joint cap) to the center of the carrier bearing bolt holes (middle of the slots).	<hr/>
B · Rear length	From the center of the carrier bearing bolt holes (middle of the slots) to the flat edge of the pinion yoke (the centerline of the u-joint cap).	<hr/>

ALSO TELL US

Transmission yoke: u-joint width and cap diameter _____

Pinion yoke u-joint series (see the u-joint chart) _____

Pinion yoke u-joint width and cap diameter _____

Rear end / differential type, if known _____

Vehicle or equipment: year, make, model _____

NOTES

- Carrier bearing bolt holes on most truck frames are slotted for adjustment. Measure to the middle of the slots.
- Ford 8" and 9" pinion yokes come with either 1-1/16" or 1-1/8" u-joint caps. That's only 1/16" apart, so measure carefully, or call us.

YOUR DETAILS

Name _____

Phone _____

Email _____

City / state _____

SEND IT: text a photo of this sheet to (572) 568-1838 or email drivetrainindustries@outlook.com

Questions while measuring? Call us.